

SPECIFICATIONS PROPOSAL & BID DOCUMENT

IALHB0664-18 – 023
Property: 1811 West 5th Street

Sioux City, Iowa

Lead Based Paint Remediation must be completed in 10 days from receiving the Notice to Proceed

All projects with costs of \$20,000 or more are subject to HUD's pre-approval prior to issuance of a Notice to Proceed.

**BIDS ARE DUE at the following location on 07/20/2020 no later than 4:00 p.m.
City of Sioux City: Neighborhood Services Division
Attn: Matt Meylor
405 6th Street, Room 305
P.O. Box 447
Sioux City, IA 51102**

NON-COLLUSION AFFIDAVIT OF PRIME BIDDER

STATE OF)) SS:
COUNTY OF)

_____, being first duly sworn, deposes and says that:

- (1) He is _____ of
(Owner, partner, office, representative, agent, other, explain)
_____, the Bidder that has submitted the attached Bid;
- (2) He is fully informed respecting the preparation and contents of the attached Bid and of all pertinent circumstances respecting such bid;
- (3) Such Bid is genuine and is not a collusive or sham Bid;
- (4) Neither the said Bidder nor any of its officers, partners, owner, agents, representatives, employees or parties in including this affiant, nor any employee or official of the City of Sioux City has in any way colluded, conspired, connived or agreed, directly or indirectly, with any other Bidder, firm or person to submit a sham bid in connection with the Contract for which the attached Bids have been submitted or to refrain from bidding in connection with such Contract, or has in any manner, directly or indirectly, sought by agreement or collusion or communication or conference with any other Bidder, firm or person to fix the price or prices in the attached Bid or of any other Bidder, or to fix overhead, profit or cost element of the Bid price or the Bid price of any other Bidder, or to secure through any collusion, conspiracy, connivance or unlawful agreement, any advantage against the City of Sioux City or the owner of the property interested in the proposed contract;
- (5) The prices quoted in the attached Bid are fair and proper and are not tainted by any collusion, conspiracy, connivance or unlawful agreement on the part of Bidder or any of its agents, representatives, owners, employers or parties in interest including this affiant, or by any employee or official of the City of Sioux City.

SIGNED

TITLE

**SIOUX CITY
LEAD HAZARD CONTROL PROGRAM
BID AND PROPOSAL**

PROJECT SPECIFICATIONS FOR PROPERTY LOCATED AT:

**1811 West 5th Street
Sioux City, Iowa 51103**

The proposal of _____ (hereinafter called "Bidder"), organized and existing under the laws of the State of _____ doing business as * _____. (*Insert "a corporation", "a partnership", or "an individual" as applicable.)

To the City of Sioux City, Iowa (hereinafter called "COMMUNITY").

In compliance with your Advertisement for Bids, BIDDER hereby proposes to perform all WORK for the project located at the above referenced property certifies, and, in the case of a joint BID, each party thereto certifies as to his own organization, that this BID has been arrived at independently, without consultation, communication, or agreement as to any matter related to this BID with any other BIDDER or with any competitor.

BIDDER hereby agrees to commence work under this proposal on or before a date to be specified in the Notice to Proceed.

BIDDER acknowledges receipt and complete understanding of the Instructions to Bidder:

Printed or typed name of BIDDER / CONTRACTOR

Signature of BIDDER / CONTRACTOR

LINE ITEM PRICING

(CONTRACTOR TO VERIFY QUANTITIES DURING WALKTHROUGH)

NOTE(S): 1) All finish work to be completed per the Bidding Instructions. 2) You are responsible for repairing any damage to components remaining in place (i.e. header and casings as part of window replacement). 3) Per Iowa Admin Code 641-70.2(135) “Paint Stabilization” means repairing any physical defect in the substrate...”			
LINE	ITEM		LEAD
#	INTERIOR DIVISION	LIRA	PRICE
1	Floor 1, Side Entry, Stringer (All) - Interim – Paint stabilization followed by the application of two coats of high-quality appropriate paint.		
2	Floor 1, Side Entry, Tread (All) - Interim – Paint stabilization followed by the installation of a wear resistant material.		
3	Floor 1, Side Entry, Landing Floor/Landing Frame (All) - Interim – Paint stabilization followed by the installation of a wear resistant material.		
4	Floor 1, Side Entry, Beam (Side A)/Joist/Joist Trim (Side D) - Interim – Paint stabilization followed by the application of two coats of high-quality appropriate paint.		
5	Floor 1, Bedroom 1 Hallway, Windows, Middle Stop/Jamb/Trough/Exterior Stop/Exterior Sash (# 5) – Abatement - Remove and replace Window Components. Remove any unnecessary storm windows and ensure all painted surfaces exposed by the activity are covered in a suitable weather resistant material that matches the surrounding. Caulk seams to create dust tight seal.		
	EXTERIOR DIVISION		PRICE
NOTE: If due to colder weather, some or all exterior work may be postponed until warmer conditions. Please make sure that your prices incorporate this, as NO change orders will be issued for additional travel expenses.			
***	If any painted areas are exposed during the completion of activities the price to treat those areas to the same level as the line item should be included.		X
7	Exterior, Side Entry, Entry Door, Jamb/Stop/Door (Side B) – Abatement – Remove and replace door components casing-to-casing, treat components to match surrounding. Provide new and replace storm door.		
8	Exterior, Window, Exterior Stop (# 6) – Abatement – Remove and replace Stop, followed by the application of two coats of high-quality appropriate paint to components.		
9	Exterior, Front Porch, Ceiling/Upper Beam/Crown Molding - Interim – Paint stabilization followed by the application of two coats of high-quality appropriate paint.		
10	Exterior, Garage, Window, Sash/Frame/Exterior Stop (Side C) – Abatement - Remove and replace Window Components. Remove any unnecessary storm windows and ensure all painted		

	surfaces exposed by the activity are covered in a suitable weather resistant material that matches the surrounding. Caulk seams to create dust tight seal.		
11	Exterior, Garage, Entry Door, Stop/Door/Casing/Header (Side B/D) – Abatement – Remove and replace door components casing-to-casing, treat components to match surrounding.		
12	Exterior, Garage, Overhead Door Stop – Abatement – Remove and replace Stop, followed by the application of two coats of high-quality appropriate paint to components.		
13	Exterior, Garage, Upper Trim/Eave/Soffit/Fascia (Side All) - Interim - Paint Stabilization followed by two coats of high quality appropriate paint. Repaint to match existing.		
	CLEAN UP AND CONTAINMENT DIVISION		PRICE
	This section includes containment and clean-up and waste removal. It may or may not include wrapping of large pieces of furniture and/or appliances. Contractor must clean dwelling sufficiently to pass clearance testing. If containment is utilized, contractor is responsible for establishing containment. If dwelling does not pass clearance on the first attempt, the contractor is responsible for costs associated with subsequent attempts. This line item shall not exceed \$1,500.		\$
	POST REMEDIATION TESTING AND CLEARANCE		PRICE
	Pre-negotiated price for the entirety of the 2018 LHCG. This amount is payable to Impact 7G., Inc. If there are any failed visual inspections they will be billed at a rate of \$300.00 per occurrence, if there are additional inspections that require dust or soil sampling they will be billed at a rate of \$600.00 per occurrence. Any amounts incurred over the initial \$900.00 are the responsibility of the contractor.		\$ 900



BID SUMMARY (1811 West 5th Street)		Base Bid Price
INTERIOR DIVISION TOTAL		\$
EXTERIOR DIVISION TOTAL		\$
CLEAN-UP AND WASTE DIVISION TOTAL		\$
TESTING AND CLEARANCE		\$ 900
TOTAL AMOUNT FOR LEAD BASE BID		\$
ALTERNATE BID ITEMS		
		Alternate Pricing
NOTE: Provide the TOTAL cost for the alternate bid items. If an alternate bid item is selected, the provided cost will replace the costs designated in the "Remove Lines."		
HH Alt	Provide and Install 2 Smoke Detectors	

HH Alt	Provide and Install 2 Carbon Monoxide Detectors	
Alt	<p>PERMANENT SIDING-VINYL - Garage</p> <p>Notes: - Bid to use plastic "Containment" on ground or floor where appropriate. All listed areas are lead hazards. Must use Lead RRP practices.</p> <ul style="list-style-type: none"> - Include all exterior coil work not covered in "soffit /fascia spec" items. - Leave no original bare or painted wood on the exterior. Wrap all with pre-colored metal. - All metal edges are to be caulked/sealed inside and outside with silicone to enclose any lead hazard. - Prepare all surfaces for new siding, including any repair work to existing siding to facilitate new vinyl covering <p>Install 1/4" foam core backer before siding. Fir out all walls that show severe waviness. Furnish and install vinyl siding in standard colors as manufactured by Certainteed (Mainstreet) or equivalent. Siding panels to be no less than .042" thickness. Contractor to install house numbers and reinstall all pre-existing attachments. All work will be done according to manufactures instructions and to Code.</p> <p>This line item would include the re-hanging of the existing gutters unless otherwise specified.</p>	
Alt.	<p>PERMANENT SOFFIT & FASCIA / METAL COIL WORK - Entire (complete cover) Garage.</p> <ul style="list-style-type: none"> - Bid to use plastic "Containment" on ground or floor where appropriate. All listed areas are lead hazards. Must use Lead RRP practices. <p>Any exterior door or window trim, (including basement window jambs & trim) not covered in separate specifications.</p> <p>All house overhang soffit, overhang supports including gable braces, and fascia.</p> <p>All overhangs to be finished with vinyl or metal soffit. For lead paint chip containment reasons, use non-vented soffit on overhangs and isolate existing soffit house vents by using vented soffit for these vents only. Include all porch lids and beams. Cover the exterior fascia with pre-painted aluminum coil trim. Face nailing should be minimized. Leave no exterior exposed wood on soffit and fascia.</p>	
HH Alt	PERMANENT SOFFIT & FASCIA / METAL COIL WORK - Entire (complete cover) Front Porch.	\$

	<p>- Bid to use plastic "Containment" on ground or floor where appropriate. All listed areas are lead hazards. Must use Lead RRP practices.</p> <p>Any exterior door or window trim, (including basement window jambs & trim) not covered in separate specifications.</p> <p>All house overhang soffit, overhang supports including gable braces, and fascia.</p> <p>All overhangs to be finished with vinyl or metal soffit. For lead paint chip containment reasons, use non-vented soffit on overhangs and isolate existing soffit house vents by using vented soffit for these vents only. Include all porch lids and beams. Cover the exterior fascia with pre-painted aluminum coil trim. Face nailing should be minimized. Leave no exterior exposed wood on soffit and fascia.</p>		
--	--	--	--

Section to be filled in by City:

ACCEPTED HEALTHY HOMES ALTERNATES	\$
ACCEPTED LBP ALTERNATES	\$
ADJUSTED BASE BID TOTAL	\$

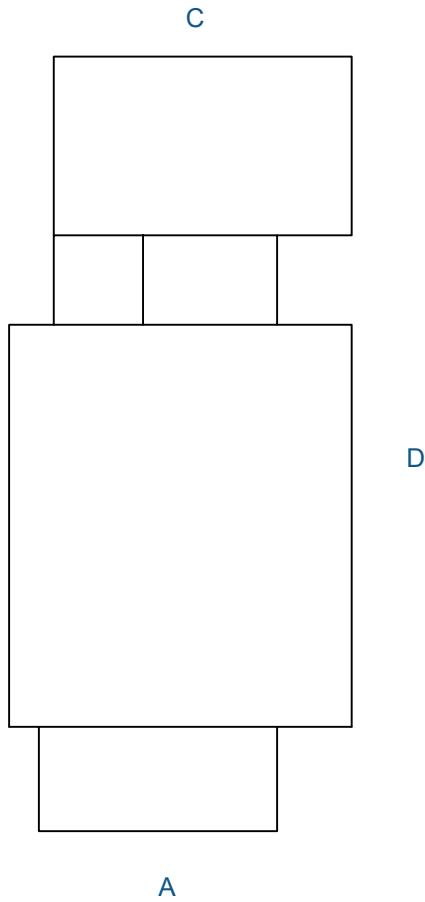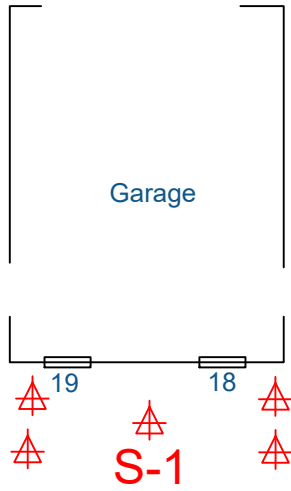

W 5th Street

Legend

- ▲ Soil Sample
- × Dust Sample
- V = Vinyl



JOB DESCRIPTION:

LBP Inspection / Risk Assessment
1811 W 5th Street
Sioux City, Iowa

DATE: 05/28/20

DRAWN BY: TS

CHECKED BY: JR


SCALE: N/A

PROJECT NO:
Sioux City LHCG 2018

SHEET TITLE:

Property Map
Exterior



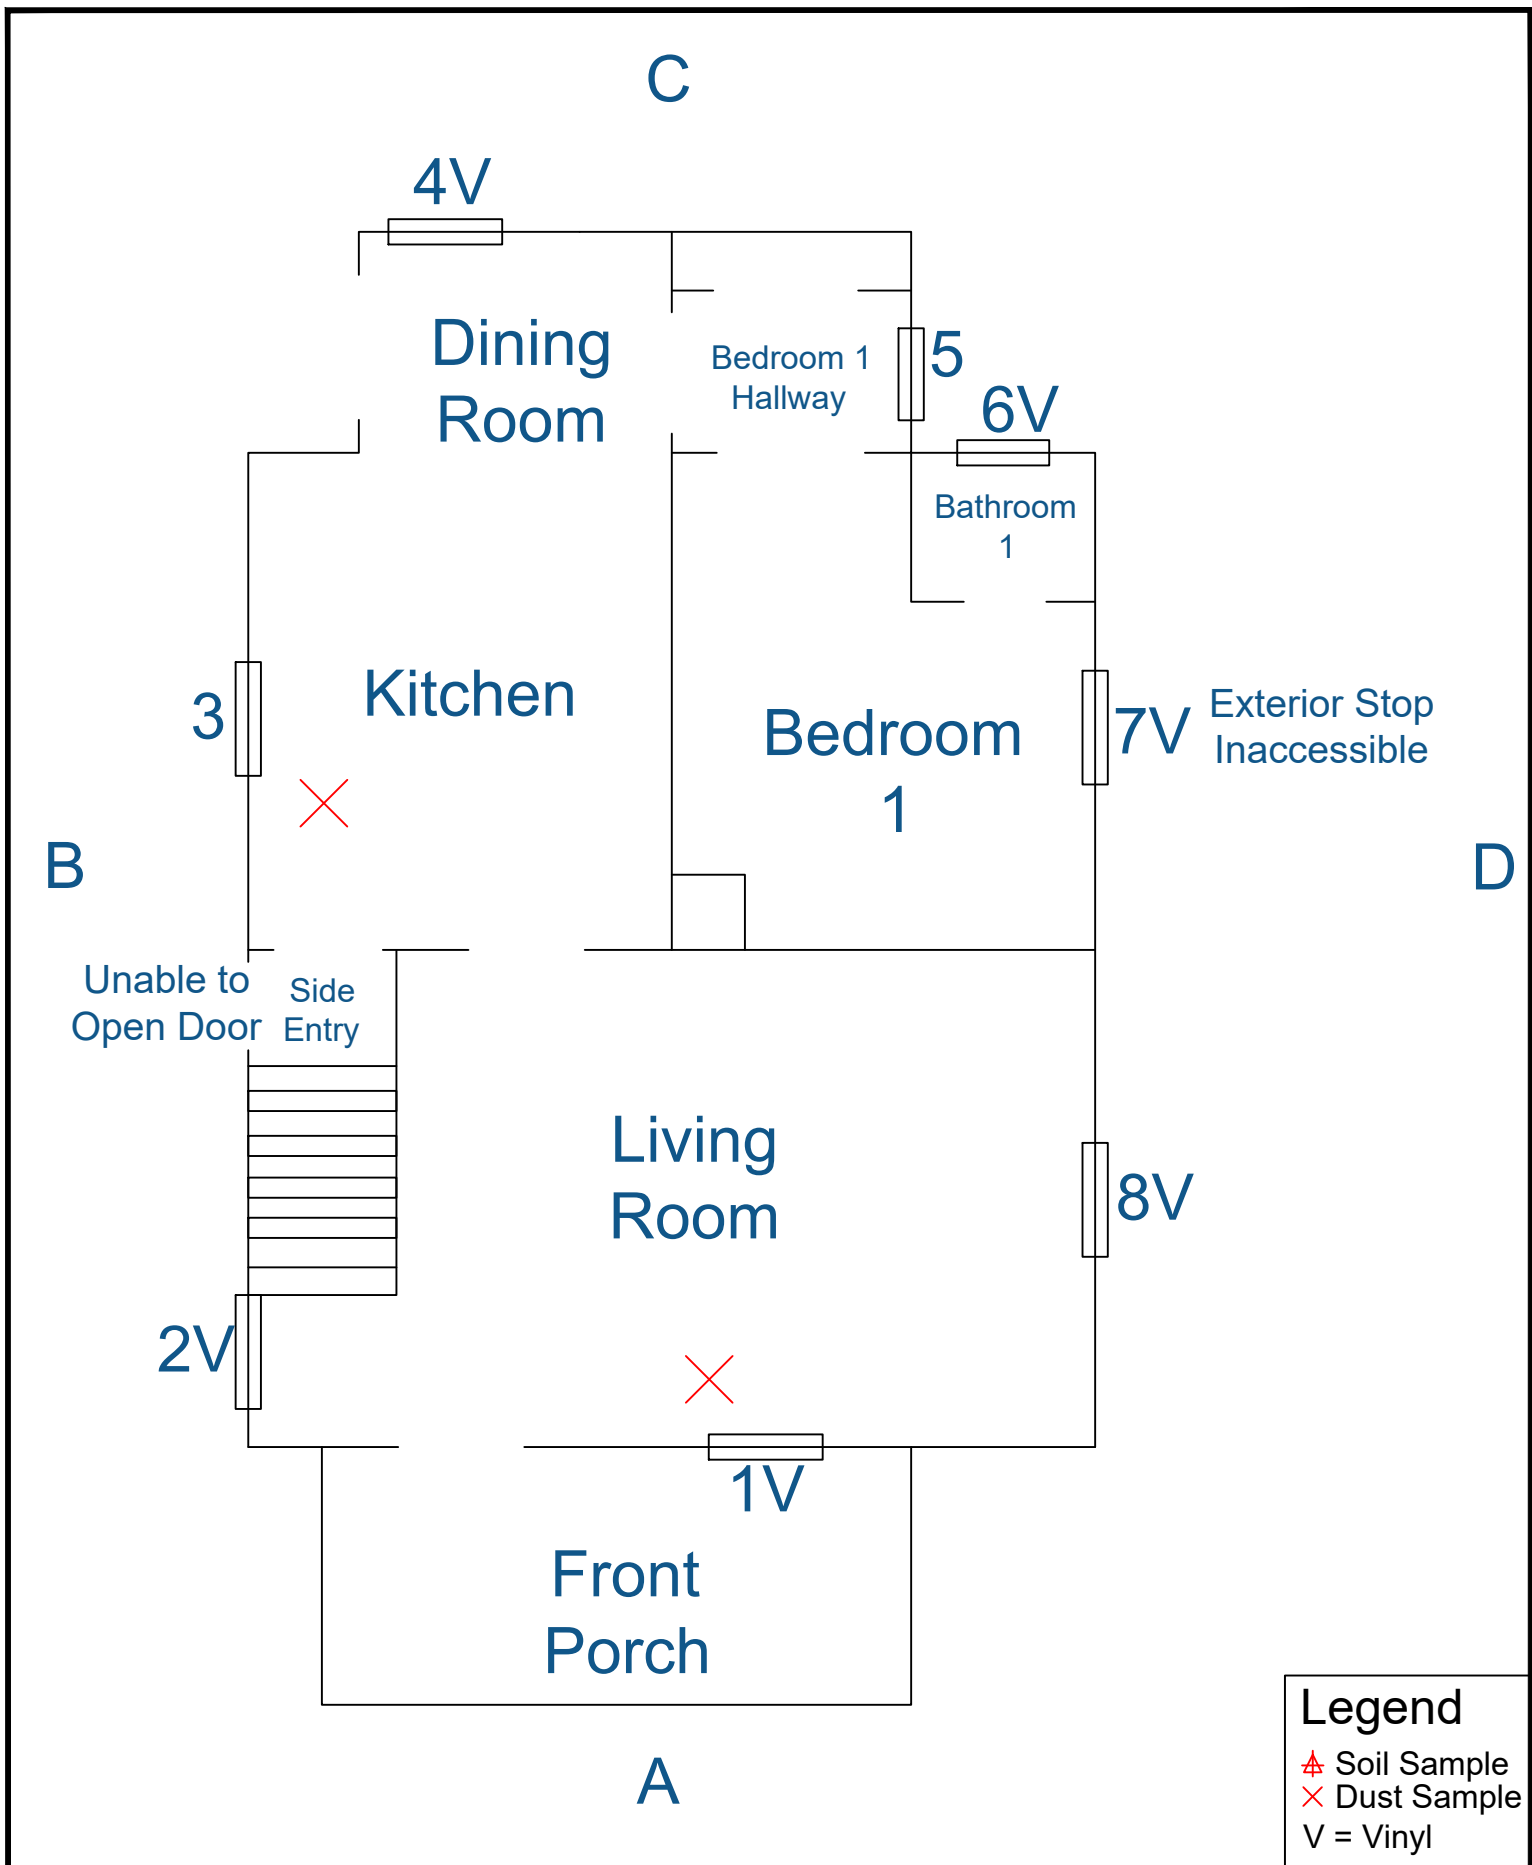

Legend


- ▲ Soil Sample
- × Dust Sample
- V = Vinyl




JOB DESCRIPTION: LBP Inspection / Risk Assessment
 1811 W 5th Street
 Sioux City, Iowa



SHEET TITLE: Property Map
 1st Floor

DATE: 05/28/20
 DRAWN BY: TS
 CHECKED BY: JR
 SCALE: N/A
 PROJECT NO: Sioux City LHCG 2018

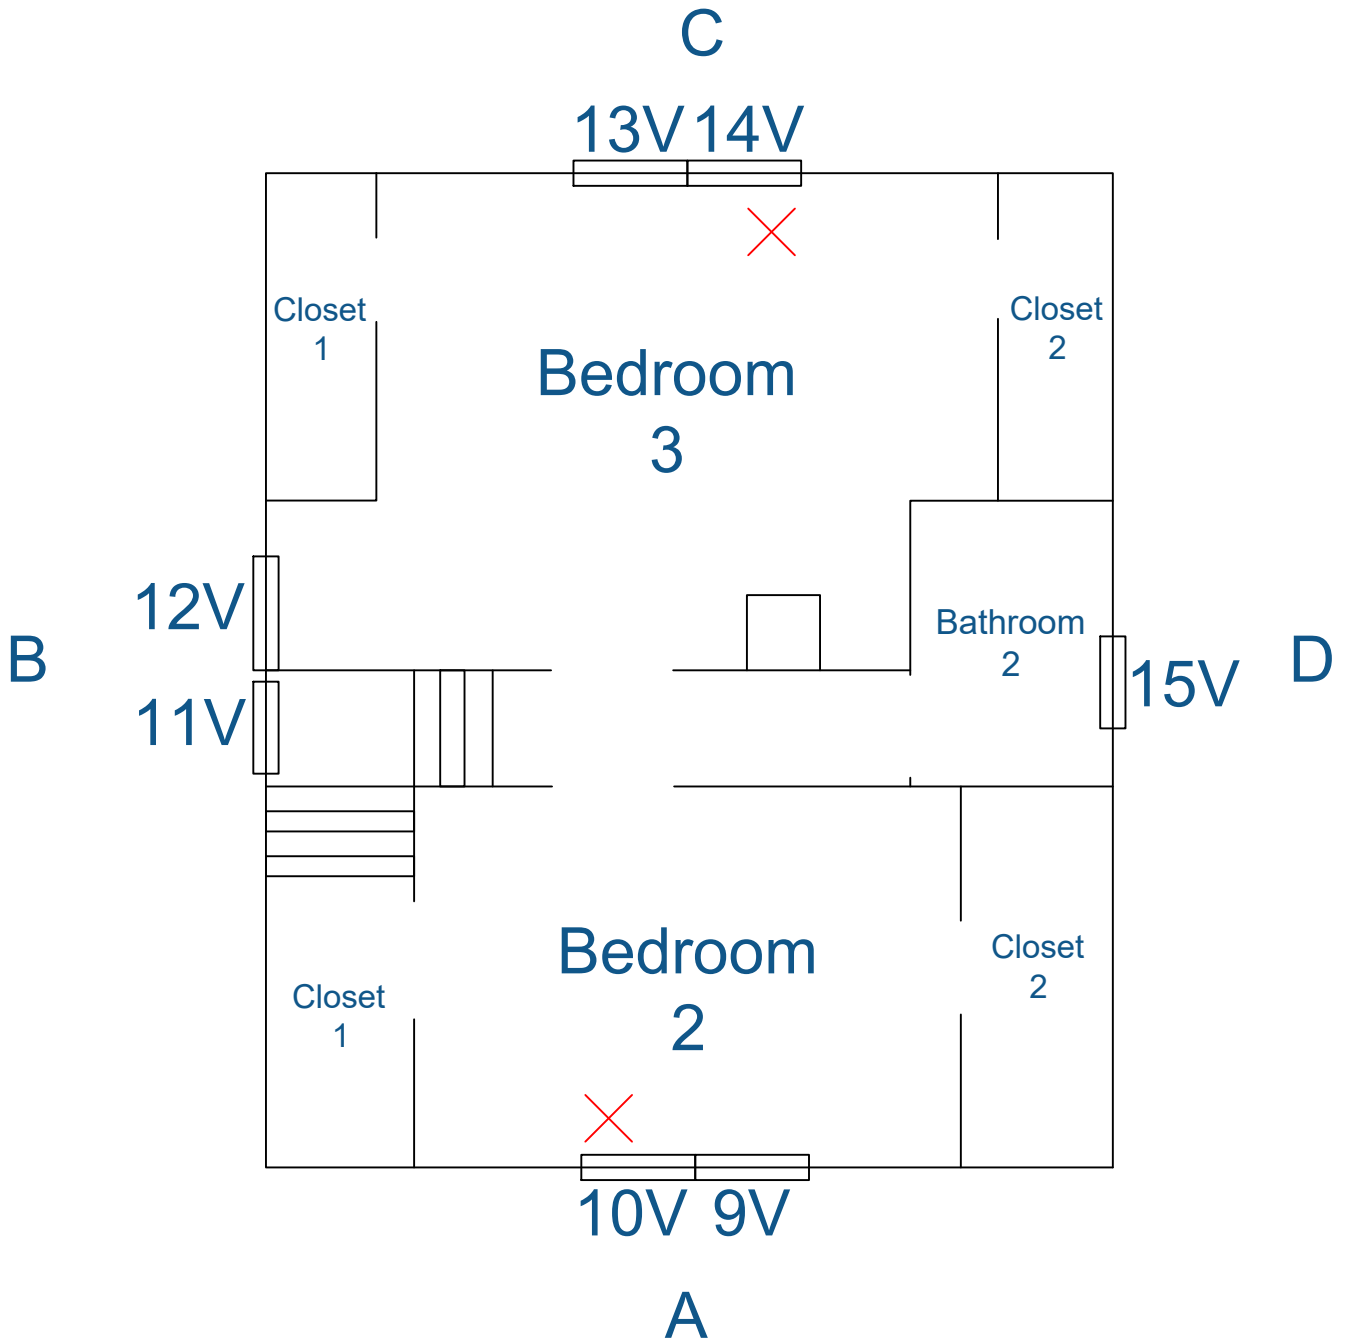




Legend


-  Soil Sample
-  Dust Sample
- V = Vinyl



JOB DESCRIPTION:	LBP Inspection / Risk Assessment 1811 W 5th Street Sioux City, Iowa
	SHEET TITLE: Property Map 2nd Floor

DATE:	05/28/20
DRAWN BY:	TS
CHECKED BY:	JR
SCALE:	N/A
PROJECT NO.:	Sioux City LHCG 2018



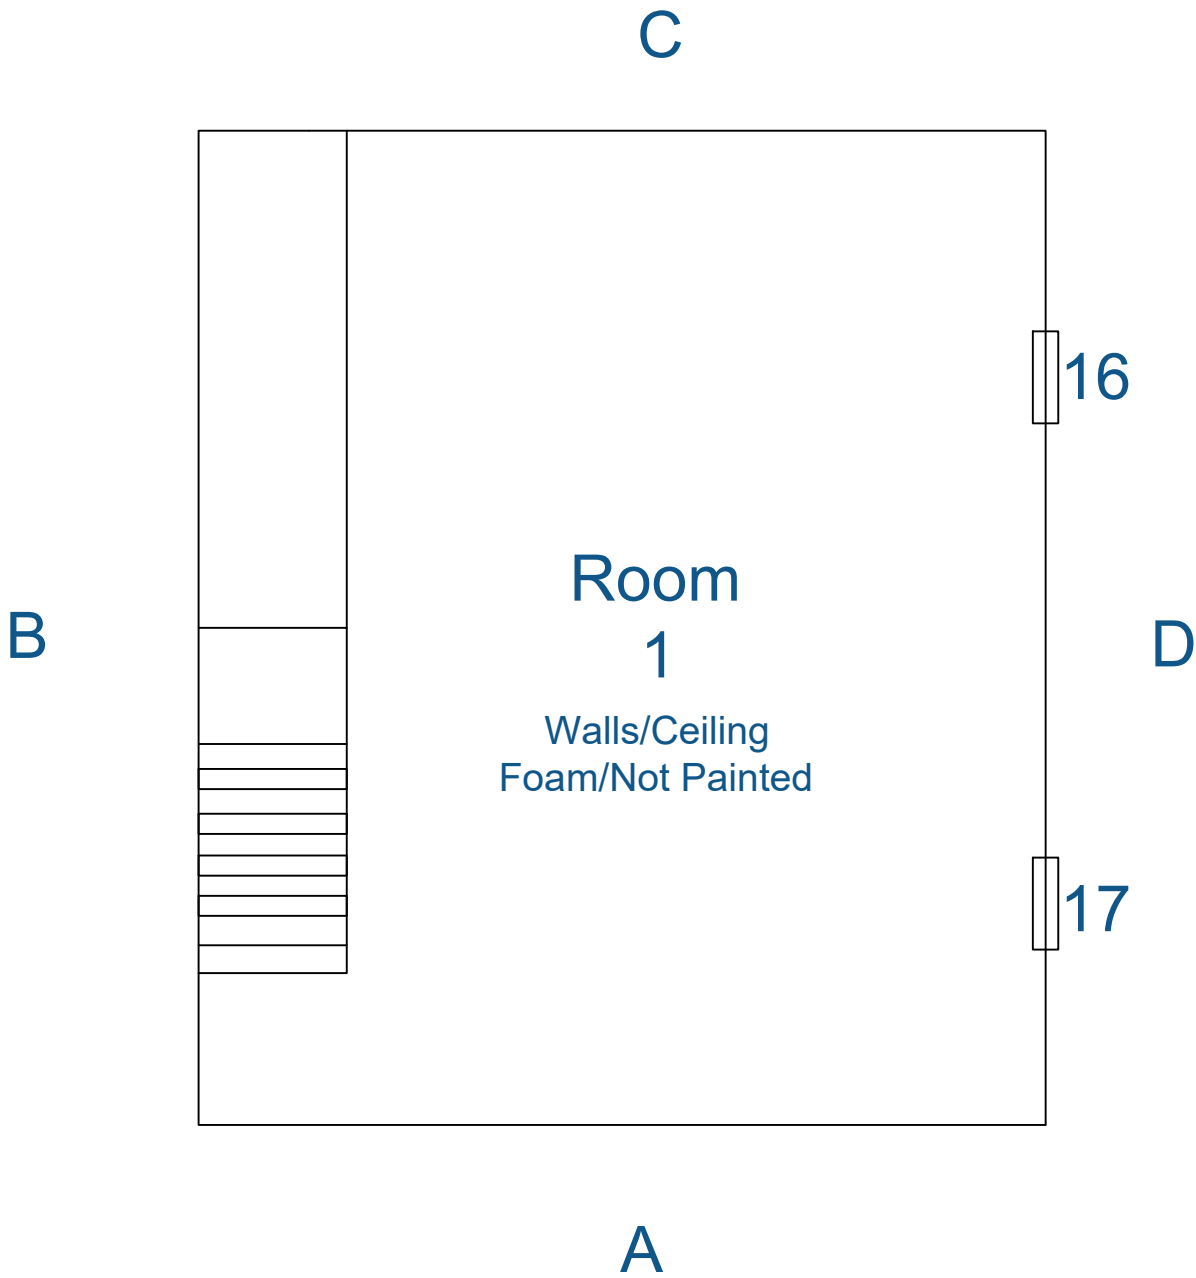

Legend

- ▲ Soil Sample
- × Dust Sample
- V = Vinyl



JOB DESCRIPTION:	LBP Inspection / Risk Assessment 1811 W 5th Street Sioux City, Iowa
	SHEET TITLE: Property Map Basement

DATE:	05/28/20
DRAWN BY:	TS
CHECKED BY:	JR
SCALE:	N/A
PROJECT NO.:	Sioux City LHCg 2018

